


Operating instructions

Open all hot water taps to expel any air prior to lighting
 Remove front cover by loosening the two screws at the lower rear corners of the cabinet.
 Check that gas and water valves are open, operate as indicated in Fig. 3
 Refit front cover and tighten screws

Fig. 3


**OPERATING INSTRUCTIONS
 STARTING**

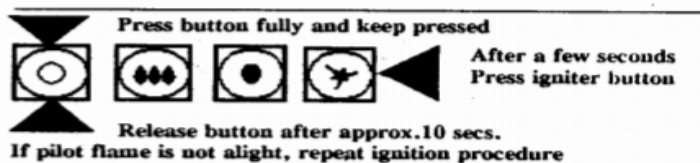

OPERATION



TEMPERATURE CONTROL

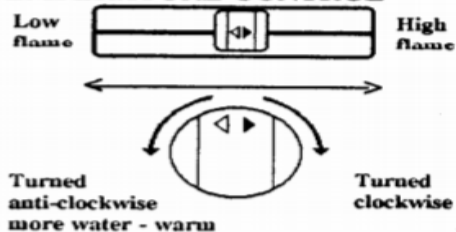

IMPORTANT

TURN HOT WATER TAP ON FULLY WHEN USING

SHUTTING OFF

(If no hot water is to be drawn for a longer period of time)



Warning - If the pilot light is extinguished, wait 5 minutes before attempting to relight the appliance. If the appliance does not operate, burns with yellow flame, leaks water or a gas smell is evident, turn off and contact the local gas authority, the manufacturer or an authorised service person.
 When attempting to light the appliance ensure that all hot water taps are turned off.